


## Sand Dryer

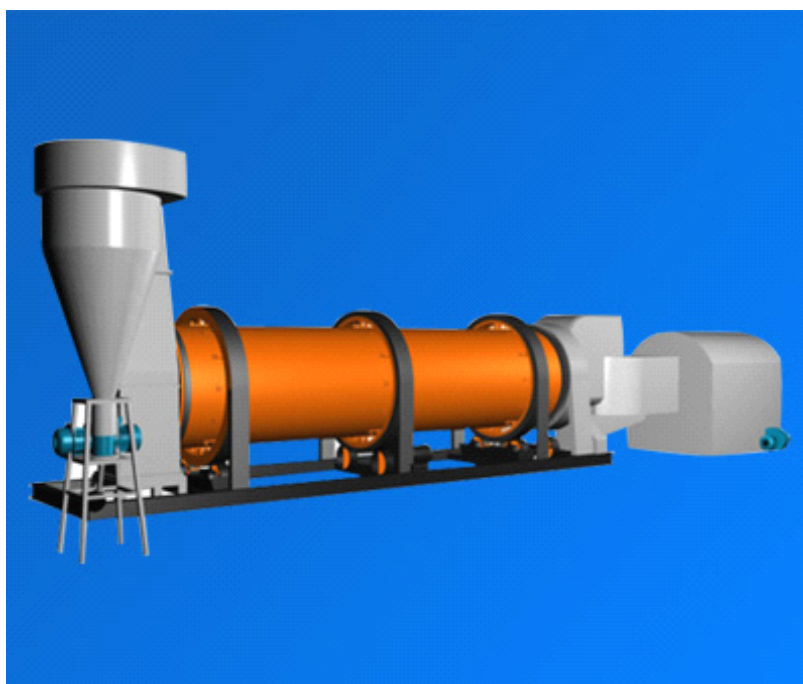

YF series of dryers are specially designed for sand drying. It has the dedicated structures not only for the dryer itself, but also for it's equiped machines to avoid the sand being stick to inside walls of the machines and regaining moisture after drying. The dryer is wrapped a layer of insulating course to reduce heat loss.

### Technical parameters

Model (mm)	Gradient (%)	Rotation speed (r/min)	Inlet air temperature (°C)	Power (kw)	Capacity (t/h)	Weight (t)	Remark
YFSZ-600	3-5	3-8	≤700	3	0.5-1.5	2.9	Note: The capacity has much to do with the heating mode for the dryer.
YFSZ-800	3-5	3-8	≤700	4	0.8-2.5	3.5	
YFSZ-1000	3-5	3-8	≤700	5.5	2.0-4.5	5.6	
YFSZ-1200	3-5	3-8	≤700	7.5	4-8	14	
YFSZ-1500	3-5	2-6	≤800	15	8-15	17.8	
YFSZ-1800	3-5	2-6	≤800	18.5	10-18	25	

800						
YFSZ-2	3-5	1.5-6	≤800	18.5	15-22	36
000						
YFSZ-2	3-5	1.5-6	≤800	22	18-25	53.8
200						
YFSZ-2	3-5	1.5-5	≤800	37	22-35	62
400						
YFSZ-3	3-5	1.5-5	≤800	75	32-45	87.5
000						